



# CV series

Accessories for CV optical fibres



## features

- Wide range of focusing devices
- Wide range of additional lenses
- IP67 protection degree
- SSF – FS1 – FX3 – FX4 series connectable
- Approvals: CE

## web contents



- Application notes
- Photos
- Catalogue / Manuals



## ordering system


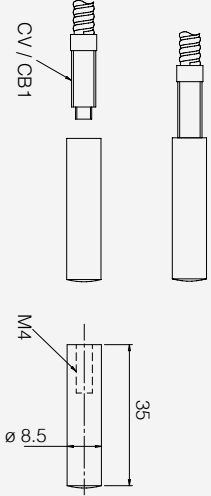
type	accessory type	SSF (EX.G.=1)	FS1 (EX.G.=1)	FX3 (EX.G.=1)	FX4 (EX.G.=1)	∅ optical fibre core	head shape	fibre model	models
scanner	focalizzatore	25 mm	25 mm	30 mm	30 mm	1	∅ 6.5 mm	CV/CB1-**	AF/FC1
		45 mm	45 mm	50 mm	50 mm			CV/CB1-**	AF/FC2
P/R	lente addizionale	1,000 mm	1,000 mm	4,000 mm	4,000		∅ 5 mm	CV/RB6-**	AF/ER1
		3,000 mm	3,000 mm	8,000 mm	10,000 mm		∅ 8.5 mm	CV/RB6-**	AF/ER2
				14,000 mm	16,000 mm		13 x 13 mm	CV/RB6-**	AF/ER3

### collimator lenses AF/FC1 model


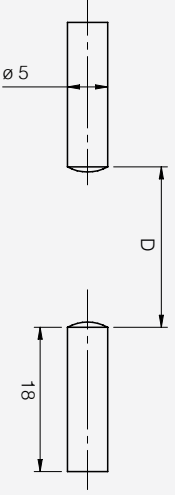
product	main features	dimensions (mm)																		
	<table border="1"> <tr> <td>∅ optical fibre core</td> <td>CV/CB1-**</td> </tr> <tr> <td>distance (with SSF)</td> <td>25 mm</td> </tr> <tr> <td>distance (with FS1)</td> <td>25 mm</td> </tr> <tr> <td>distance (with FX3)</td> <td>30 mm</td> </tr> <tr> <td>distance (with FX4)</td> <td>30 mm</td> </tr> <tr> <td>thread</td> <td>M4</td> </tr> <tr> <td>protection degree</td> <td>IP67 (EN60529)</td> </tr> <tr> <td>temperature range</td> <td>-40°C.....+125°C</td> </tr> <tr> <td>materials</td> <td>glass, nickel-plated brass</td> </tr> </table>	∅ optical fibre core	CV/CB1-**	distance (with SSF)	25 mm	distance (with FS1)	25 mm	distance (with FX3)	30 mm	distance (with FX4)	30 mm	thread	M4	protection degree	IP67 (EN60529)	temperature range	-40°C.....+125°C	materials	glass, nickel-plated brass	
∅ optical fibre core	CV/CB1-**																			
distance (with SSF)	25 mm																			
distance (with FS1)	25 mm																			
distance (with FX3)	30 mm																			
distance (with FX4)	30 mm																			
thread	M4																			
protection degree	IP67 (EN60529)																			
temperature range	-40°C.....+125°C																			
materials	glass, nickel-plated brass																			




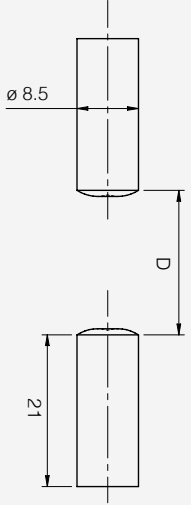
focusing device (diffuse reflection) AF/FC2 model

product	main features	dimensions (mm)																		
	<table border="1"> <tr> <td>Ø optical fibre core</td> <td>CV/CB1-**</td> </tr> <tr> <td>distance (with SSF)</td> <td>45 mm</td> </tr> <tr> <td>distance (with FS1)</td> <td>45 mm</td> </tr> <tr> <td>distance (with FX3)</td> <td>50 mm</td> </tr> <tr> <td>distance (with FX4)</td> <td>50 mm</td> </tr> <tr> <td>thread</td> <td>M4</td> </tr> <tr> <td>protection degree</td> <td>IP67 (EN60529)</td> </tr> <tr> <td>temperature range</td> <td>-40°C....+125°C</td> </tr> <tr> <td>materials</td> <td>glass, nickel-plated brass</td> </tr> </table>	Ø optical fibre core	CV/CB1-**	distance (with SSF)	45 mm	distance (with FS1)	45 mm	distance (with FX3)	50 mm	distance (with FX4)	50 mm	thread	M4	protection degree	IP67 (EN60529)	temperature range	-40°C....+125°C	materials	glass, nickel-plated brass	
Ø optical fibre core	CV/CB1-**																			
distance (with SSF)	45 mm																			
distance (with FS1)	45 mm																			
distance (with FX3)	50 mm																			
distance (with FX4)	50 mm																			
thread	M4																			
protection degree	IP67 (EN60529)																			
temperature range	-40°C....+125°C																			
materials	glass, nickel-plated brass																			


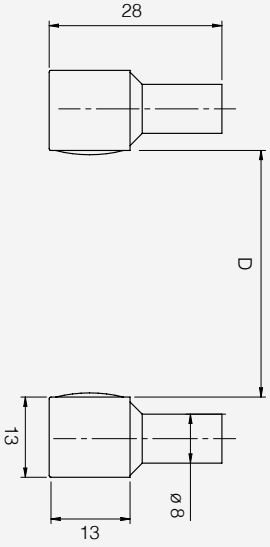
additional lens (through-beam) AF/ER1 model

product	main features	dimensions (mm)																		
	<table border="1"> <tr> <td>Ø optical fibre core</td> <td>CV/RB6-**</td> </tr> <tr> <td>distance (with SSF)</td> <td>1,000 mm</td> </tr> <tr> <td>distance (with FS1)</td> <td>1,000 mm</td> </tr> <tr> <td>distance (with FX3)</td> <td>4,000 mm</td> </tr> <tr> <td>distance (with FX4)</td> <td>6,000 mm</td> </tr> <tr> <td>thread</td> <td>M4</td> </tr> <tr> <td>protection degree</td> <td>IP67 (EN60529)</td> </tr> <tr> <td>temperature range</td> <td>-40°C....+70°C</td> </tr> <tr> <td>materials</td> <td>glass, nickel-plated brass</td> </tr> </table>	Ø optical fibre core	CV/RB6-**	distance (with SSF)	1,000 mm	distance (with FS1)	1,000 mm	distance (with FX3)	4,000 mm	distance (with FX4)	6,000 mm	thread	M4	protection degree	IP67 (EN60529)	temperature range	-40°C....+70°C	materials	glass, nickel-plated brass	
Ø optical fibre core	CV/RB6-**																			
distance (with SSF)	1,000 mm																			
distance (with FS1)	1,000 mm																			
distance (with FX3)	4,000 mm																			
distance (with FX4)	6,000 mm																			
thread	M4																			
protection degree	IP67 (EN60529)																			
temperature range	-40°C....+70°C																			
materials	glass, nickel-plated brass																			

additional lens (through-beam) AF/ER2 model

product	main features	dimensions (mm)																		
	<table border="1"> <tr> <td>∅ optical fibre core</td> <td>CV/RB6-**</td> </tr> <tr> <td>distance (with SSF)</td> <td>3,000 mm</td> </tr> <tr> <td>distance (with FS1)</td> <td>3,000 mm</td> </tr> <tr> <td>distance (with FX3)</td> <td>8,000 mm</td> </tr> <tr> <td>distance (with FX4)</td> <td>10,000 mm</td> </tr> <tr> <td>thread</td> <td>M4</td> </tr> <tr> <td>protection degree</td> <td>IP67 (EN60529)</td> </tr> <tr> <td>temperature range</td> <td>-40°C....+125°C</td> </tr> <tr> <td>materials</td> <td>glass, nickel-plated brass</td> </tr> </table>	∅ optical fibre core	CV/RB6-**	distance (with SSF)	3,000 mm	distance (with FS1)	3,000 mm	distance (with FX3)	8,000 mm	distance (with FX4)	10,000 mm	thread	M4	protection degree	IP67 (EN60529)	temperature range	-40°C....+125°C	materials	glass, nickel-plated brass	
	∅ optical fibre core	CV/RB6-**																		
	distance (with SSF)	3,000 mm																		
	distance (with FS1)	3,000 mm																		
	distance (with FX3)	8,000 mm																		
	distance (with FX4)	10,000 mm																		
	thread	M4																		
	protection degree	IP67 (EN60529)																		
temperature range	-40°C....+125°C																			
materials	glass, nickel-plated brass																			

additional lens (through-beam) AF/ER3 model

product	main features	dimensions (mm)																		
	<table border="1"> <tr> <td>∅ optical fibre core</td> <td>CV/RB6-**</td> </tr> <tr> <td>distance (with SSF)</td> <td>3,000 mm</td> </tr> <tr> <td>distance (with FS1)</td> <td>3,000 mm</td> </tr> <tr> <td>distance (with FX3)</td> <td>8,000 mm</td> </tr> <tr> <td>distance (with FX4)</td> <td>10,000 mm</td> </tr> <tr> <td>thread</td> <td>M4</td> </tr> <tr> <td>protection degree</td> <td>IP67 (EN60529)</td> </tr> <tr> <td>temperature range</td> <td>-40°C....+70°C</td> </tr> <tr> <td>materials</td> <td>glass, nickel-plated brass</td> </tr> </table>	∅ optical fibre core	CV/RB6-**	distance (with SSF)	3,000 mm	distance (with FS1)	3,000 mm	distance (with FX3)	8,000 mm	distance (with FX4)	10,000 mm	thread	M4	protection degree	IP67 (EN60529)	temperature range	-40°C....+70°C	materials	glass, nickel-plated brass	
	∅ optical fibre core	CV/RB6-**																		
	distance (with SSF)	3,000 mm																		
	distance (with FS1)	3,000 mm																		
	distance (with FX3)	8,000 mm																		
	distance (with FX4)	10,000 mm																		
	thread	M4																		
	protection degree	IP67 (EN60529)																		
temperature range	-40°C....+70°C																			
materials	glass, nickel-plated brass																			

